

Descanso[®]

WIDESPREAD LAVATORY FAUCET

Features

- 6" spout center to center
- 1/4" turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- 1.2 gpm (4.5 L /min) max flow rate
- All brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards Applicable

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA




CF-3102X CF-3102XK CF-3102XF





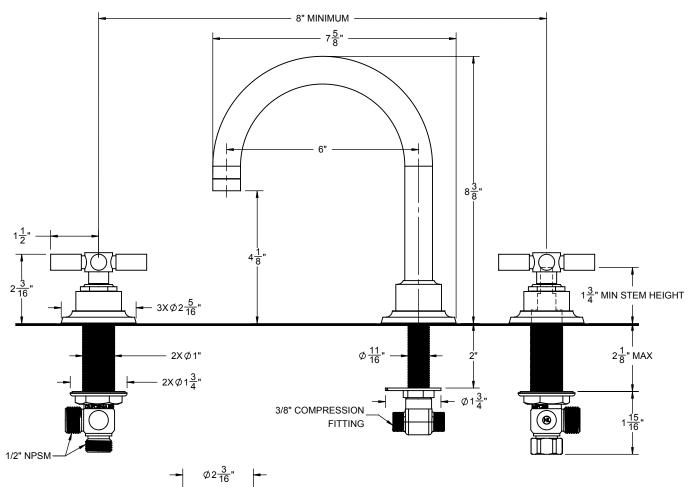



 THROUGH-HOLE SPECIFICATIONS

 MIN
 RECOMENDED
 MAX

 SPOUT: ∅1"
 ∅1-1/8"
 ∅1-1/2"

 VALVE: ∅1"
 ∅1-1/8"
 ∅1-1/2"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"