



Features

- Base diameter 2-5/16"
- Use for wall stop, wall diverter, or deck diverter
- Rough valve (50-W-R, 75-W-R, WDV-R, DDV-R) sold separately
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards Applicable


Meets or exceeds the following at date of manufacture:


- ASME A112.18.1/CSA B125.1
- ADA compliant





(TO-30F-W SHOWN)

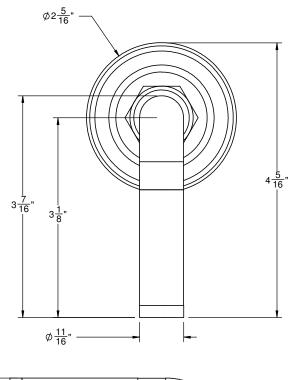

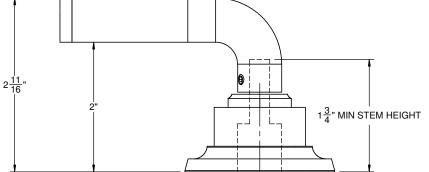

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	<u>MAX</u>
VALVE: Ø11/16"	Ø1-1/4	Ø1-5/8"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"

TO-30-W_sp_180417