




## Information

- Floor-mount installation
- Aerated flow rate ≤1.2 max gpm
- 7-7/8" spout reach
- 38-15/16" maximum spout height
- Drain assembly not included
- ADA
- CALGreen

# G-6315-LM58N-T Sento Series

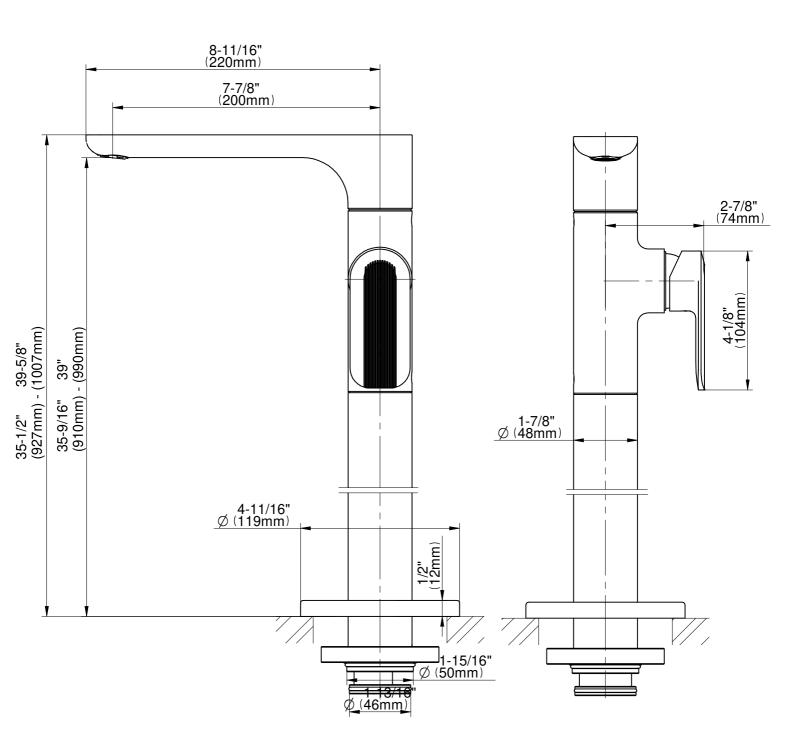







## Information

- Floor-mount installation
- Aerated flow rate ≤1.2 max gpm
- 7-7/8" spout reach
- 38-15/16" maximum spout height

Unfinished Architectural

White

**Brushed Brass** 

- Drain assembly not included
- ADA
- CALGreen


#### **Finishes**

Unfinished

**Brass** 



# G-6315-LM58N-T Sento Series

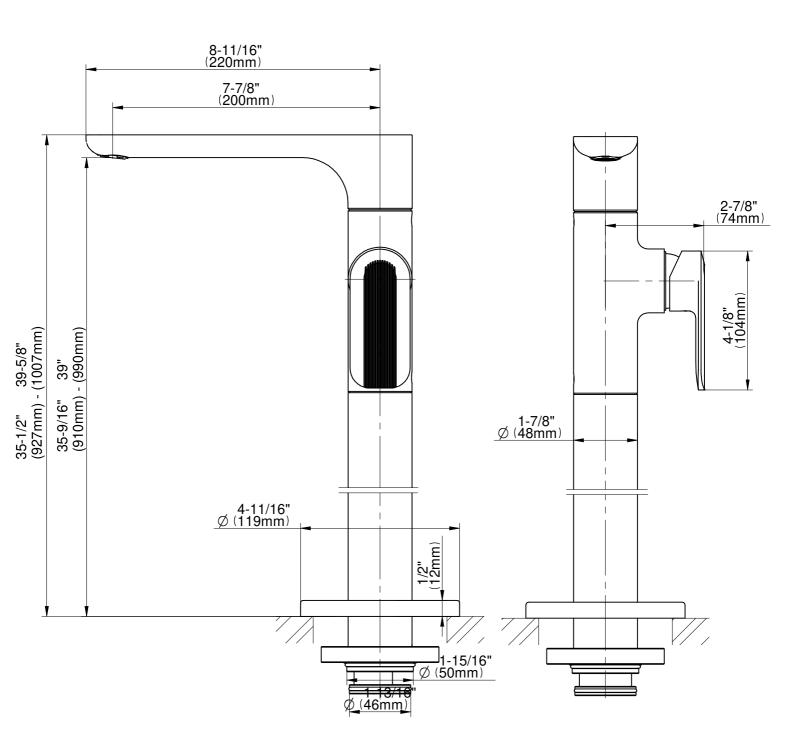








## **Finishes**









Polished

Chrome





Brushed

Nickel



Gunmetal



OR'osa PVD® Steelnox® (Satin Nickel)



Unfinished **Brass** 



Unfinished **Brushed Brass** 



Architectural White





#### **Product Features**

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

## Warranty

• Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

