



REPLACEMENT FILTER UNIT ONLY

Perrin & Rowe® Filtration featuring "Triflow® Technology"

FRX02

FEATURES


- Replacement filter for U.1812 filters system
- Also for use with Country Kitchen filter faucets A1435 and A1635
- Meets NSF42 and 53 for chlorine and lead reduction
- Complies to NSF61, sec. 9
- Filters to 0.2 microns
- Reduces Cryptosporidium parvum, E. Coli, Salmonella, and other bacteria
- Made of Ceramic, Silver, Carbon and Zeolite
- Reduces particulates, improves taste and reduces all heavy metals
- Reduces Pathogenic bacteria, cysts, turbidity, organics, foul tastes and odor
- Also reduces insecticides, herbicides and hydrocarbons
- 1,000 gallon capacity

FINISHES

- N/A

WARRANTY

- 6 Months on Manufacturer Defects

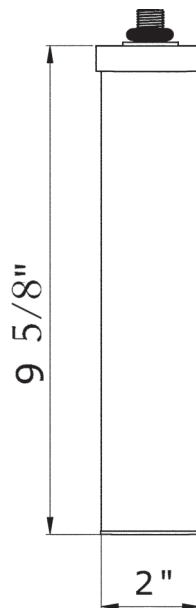


Installation Instructions



TRIFLOW®

The Triflow Kitchen Collection
Filter Replacement Guide

- U-1609 : MATRIKX PB+
- U-1812 : FRX02
- U-1816 : HIGH FLOW CARTRIDGE

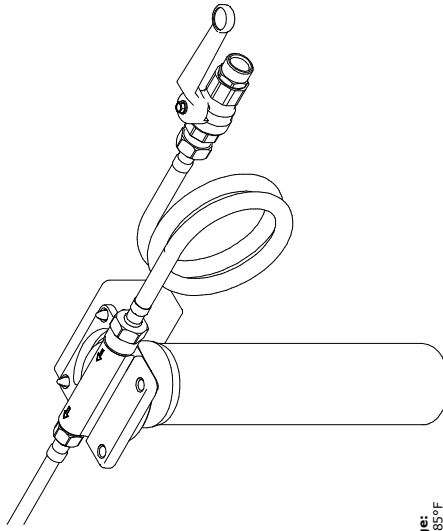

Temp Range:
Max. 85°C/185°F

Recommended Working Pressure:
Max. 7bar/100psi
Max. 5bar/75psi

Please register your new product.
Complete the enclosed registration card, or call Toll free on 1-800 787 1066.

ROHL WARRANTY POLICY

All products supplied by ROHL carry warranties against manufacturing defects.

Triflow products carry a Limited Lifetime Warranty.

ROHL LLC will provide free of charge, as its option, replacement part(s) or product (or a comparable alternative product) to replace those which have proven defective in materials or workmanship.

For full ROHL LLC WARRANTY please contact ROHL or visit www.rohlhome.com


SPARES



Replacement Filter FRX02 installed in the U-1812



Replacement Pbs Filter U-1816 installed in the U-1609



Replacement Filter Matrikx Pbs+ U-1609 (Carbon Zeolite Block)

Cartridge Service

Triflow
2395 Sandburg Road
Minneapolis,
MN 55427



Katadyn of Switzerland
Exclusive manufacturers of the FRX02 Filter Cartridges for Triflow

Triflow is a registered trademark of Triflow Concepts Ltd.

91018020

Issue 4

Installation Instructions

Thank you for your continuing support of the Triflow product.

The Triflow Collection
Filter Replacement Guide

IMPORTANT INFORMATION

The following instructions are for the filter replacement you are installing. Please read carefully to ensure correct installation.


In addition to the guide below it is essential that the written information overleaf is carefully read and understood.

Preparation for Installer

Flush the plumbing system before installing the kitchen product.

1


Shut off mains supply. A stop valve was supplied with this system for this purpose and will be located on the adjacent pipe work.



Turn the filtered lever on the faucet to the on position. This will confirm the water supply is off, and release the pressure in the system.


2

Ensure you have the correct fittings to connect to the filter faucet.



3


Only if fitted with clip, as on early models.




Holding the cap clip down rotate the housing a quarter turn and slide the housing down.

4


Slide the housing off the filter cartridge. Whilst holding the housing, unscrew the cartridge and discard the cartridge with your house-hold waste, wrapped in paper or placed in a polythene bag.



If space is restricted slide the housing off the filter cartridge. Whilst holding the housing, unscrew the cartridge and discard the cartridge with your house-hold waste, wrapped in paper or placed in a polythene bag.




5 • Only if necessary due to restricted access.



Conveniently position a suitable receptacle to catch the water from the housing and remove hoses.


6

Take the new cartridge out of the cap on the threaded end of the cartridge.




7

Screw carefully into the cap. Make sure the thread on the inside of the cap. Fit the housing over the cartridge with a quarter turn.



Please Note: The cartridge is fragile and can be damaged if not handled carefully. Care should be taken when screwing the cartridge into the housing cap. Be careful not to over tighten the cartridge.

9



Turn on the main supply valve. Run the filtered water for 2 minutes to flush the system, and carefully check the system for leaks. The system is now ready for use.

IMPORTANT NOTE

Do not use with water, that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

With a rated service capacity of 340.6 litres (900 gallons) the U.1802 filter cartridge should be replaced every six months to ensure optimum performance.

To Winterize the Unit

If you plan to be away from home for extended periods, or the filter housing may be subject to the risk of freezing, carry out the procedures 1-2 as above. When the risk of freezing has subsided or you wish to use the system again open the main supply and allow the water to run for 2 minutes to flush the system, the system is now ready to use. Freezing will invalidate the warranty.