
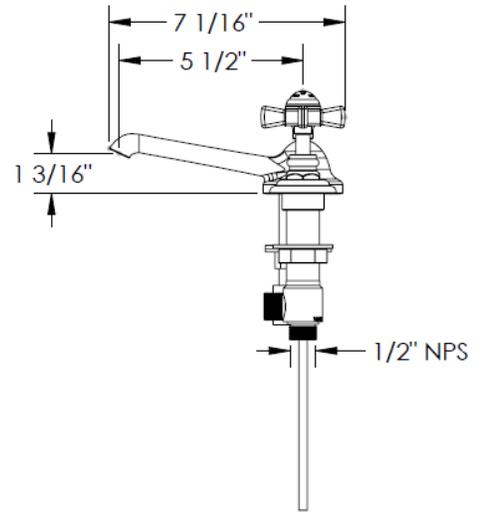


FEATURES


- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

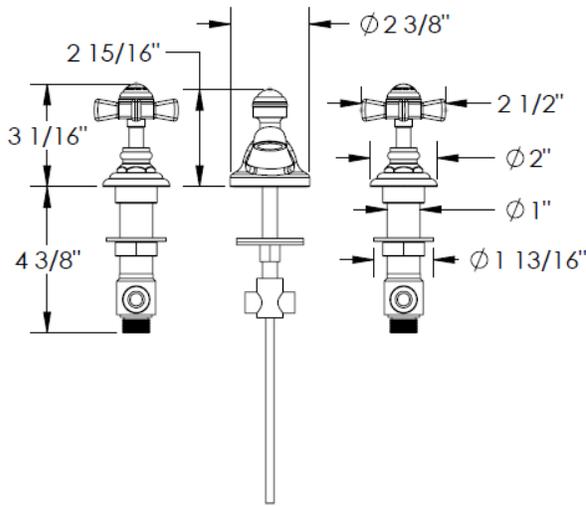


ITEM NO.	PART NUMBER	QTY.
1	321-2-SPT	1
8	AS568 - 34	1
9	501-LIFT-ROD	1
10	321-2-TEE	1
12	MR03 US - 1.5 GPM	1
13	321-2-GSKT	1
14	.4375-18-NUT	1
15	321-2-WSHR	1
16	SPPLY-HOSE-0.5-14-NPS	2
17	321-2-RBBR-WSHR	1
18	L4-TOP-LOCK-NUT	2
19	142-LOCK-NUT	2
20H/20C	SS-502 Valve Body	2
21H/21C	SS-502 Cartridge	2

HANDLE TRIMS


Preston (Code: S1)

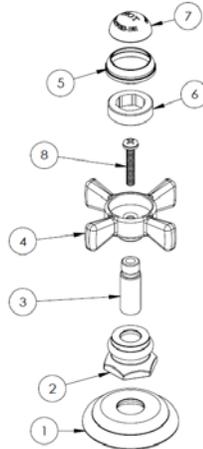


ITEM NO.	PART NUMBER	QTY.
1	S1-ESC	1
2	S1-ESC-NUT	1
3	S1-STEM	1
4	S1-HNDL-(COLD/HOT)	1
5	S1-CAP-RING	1
6	S1-CAP-ADAP	1
7	S1-PRCLN-INSRT-(PLN/COLD/HOT)	1
8	CR-PHMS 0.164-32x1x1-S	1




Nottingham (Code: S1A)

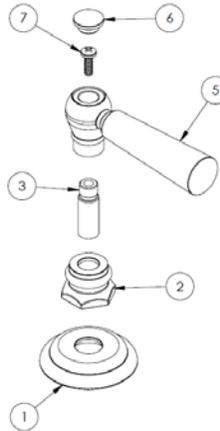


ITEM NO.	PART NUMBER	QTY.
1	S1-ESC	1
2	S1-ESC-NUT	1
3	S1-STEM	1
5	S1A-LVR	1
6	A-POST-CAP	1
7	CR-PHMS 0.164-32x0.5x0.5-S	1

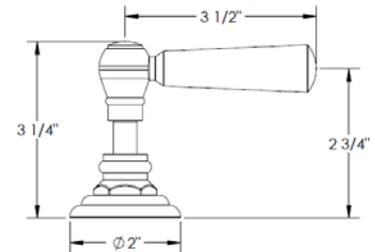


Waltham (Code: S2)

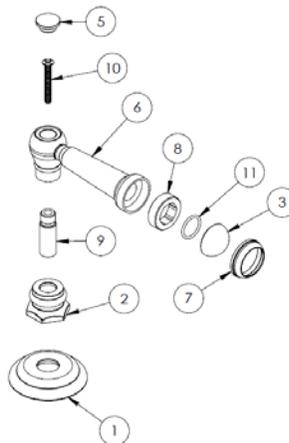


ITEM NO.	PART NUMBER	QTY.
1	S1-ESC	1
2	S1-ESC-NUT	1
3	S1-PRCLN-INSRT-(PLN/COLD/HOT)	1
5	A-POST-CAP	1
6	S2-LVR	1
7	S1-CAP-RING	1
8	S1-CAP-ADAP	1
9	S1-STEM	1
10	CR-FHMS 0.164-32x1.25x1.25-S	1
11	AS568 - 015	1




Danbury (Code: S3)

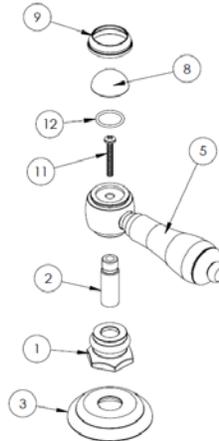


ITEM NO.	PART NUMBER	QTY.
1	S1-ESC-NUT	1
2	S1-STEM	1
3	S1-ESC	1
5	S3-PRCLN-LVR-INSRT	1
8	S1-PRCLN-INSRT-PLN	1
9	S1-CAP-RING	1
11	CR-PHMS 0.138-32x1x1-S	1
12	AS568 - 015	1

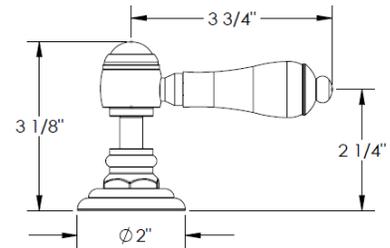


San Francisco (Code: SW)

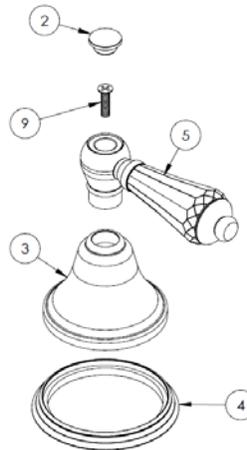


ITEM NO.	PART NUMBER	QTY.
2	A-POST-CAP	1
3	A-ESC	1
4	A-ESC-RING	1
5	SW-CRSTL-LVR-INSRT	1
9	CR-FHM1 0.164-32x0.625x0.625-S	1

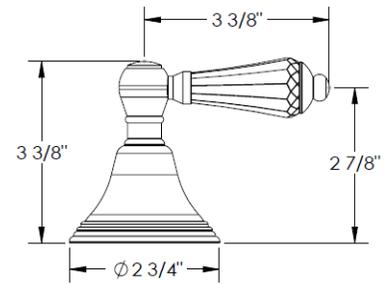

Wales (Code: V)

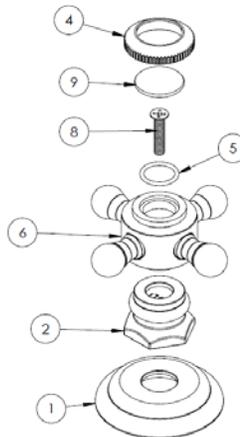


ITEM NO.	PART NUMBER	QTY.
1	S1-ESC	1
2	S1-ESC-NUT	1
4	X-CAP-RING	1
5	AS568 - 014	1
6	V-POST	1
8	CR-FHM1 0.164-32x0.75x0.75-S	1
9	X-PRCLN-INSRT-PLN	1



Boston (Code: WW)



ITEM NO.	PART NUMBER	QTY.
2	A-POST-CAP	1
3	STA-LVR	1
4	A-ESC	1
5	A-ESC-RING	1
6	CR-FHM1 0.164-32x0.625x0.625-S	1

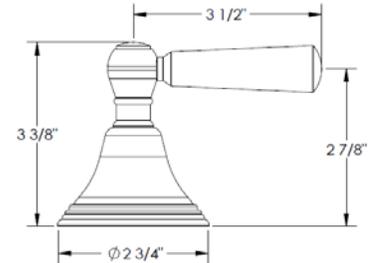

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800

Rev. 1/1